


N 50, Built-in oven, 60 x 60 cm, Stainless steel  
B3ACE4HN0B



COOKING PASSION SINCE 1877



A



Built-in Slide&Hide® oven with fixed handle - unrestricted access to the oven interior thanks to the fully retracting oven door

- ✓ Hide® – The fully retracting oven door.
- ✓ CircoTherm® – Smart hot-air solution that lets you bake on up to three levels at once.
- ✓ LCD-Display – simple, straightforward with large characters for clear reading
- ✓ Cliprails – Place dishes exactly where you want them in your oven.

#### Features

##### Technical Data

Color / Material Front : Stainless steel  
Construction type : Built-in  
Integrated Cleaning system : Catalytic partial, Hydrolytic  
Required niche size for installation (HxWxD) : 585-595 x 560-568 x 550 mm  
Dimensions : 595 x 594 x 548 mm  
Dimensions of the packed product (HxWxD) : 670 x 690 x 660 mm  
Control Panel Material : Glass  
Door Material : Glass  
Net weight : 35.024 kg  
Usable volume of cavity : 71 l  
Cooking method : Bottom heat, Conventional heat, Full width grill, Hot Air, Hotair gentle, Hot air grilling, Pizza setting  
First cavity material : Other  
Oven control : mechanical  
Number of interior lights : 1  
Approval certificates : CE, VDE  
Length of electrical supply cord : 120 cm  
EAN code : 4242004225164  
Number of cavities (2010/30/EC) : 1  
Energy efficiency rating : A  
Energy consumption per cycle conventional (2010/30/EC) : 1.04 kWh/cycle  
Energy consumption per cycle forced air convection (2010/30/EC) : 0.81 kWh/cycle  
Energy efficiency index (2010/30/EC) : 95.3 %  
Connection rating : 2990 W  
Fuse protection : 13 A  
Voltage : 220-240 V  
Frequency : 60; 50 Hz  
Plug type : no plug

#### Optional accessories

|           |                                       |
|-----------|---------------------------------------|
| Z11AB15A0 | Baking tray, non-stick ceramic coated |
| Z11CB10E0 | Baking tray, grey enamelled           |
| Z11CR10X0 | Baking and roasting grid (standard)   |
| Z11TF36X0 | 3 level telescopic rails, full ext    |
| Z11TI15X0 | Cliprails                             |
| Z1913X0   | Baking Stone                          |



4 242004 225164

*N 50, Built-in oven, 60 x 60 cm, Stainless steel*  
*B3ACE4HNOB*



COOKING PASSION SINCE 1877

## Features

### Design

- LCD Display (White)
- Elongated designed dials, Retractable control dials, Bevelled oval controls
- Slide&Hide® with fixed handle
- 4 shelf positions
- Bar handle
- Cavity inner surface: enamel grey

### Features

- Control panel lock
- Heating up indicator  
Automatic start
- Interior halogen light

### Cleaning

- EcoClean Direct : back panel
- EasyClean
- Full glass inner door

### Programmes/functions

- Oven with 7 PC heating methods: CircoTherm®, Top/bottom heat, Circo-roasting, Full surface grill, CircoTherm® intensive, Bottom heat, CircoTherm® gentle
- Cooling fan

### Accessories


- 1 Clip rail, Stop function
- 1 x universal pan, 2 x combination grid

### Performance/technical information

- Energy efficiency rating (acc. EU Nr. 65/2014): A  
Energy consumption per cycle in conventional mode: 1.04 kWh  
Energy consumption per cycle in fan-forced convection mode: 0.81 kWh  
Number of cavities: Main cavity  
Heat source: electrical  
Cavity volume: 71 litre
- Total connected load electric: 2.99 KW
- 120 cm Cable length
- Nominal voltage: 220 - 240 V
- Appliance dimension (hxwxd): 595 mm x 594 mm x 548 mm
- Niche dimension (hxwxd): 585 mm - 595 mm x 560 mm - 568 mm x 550 mm
- Please refer to the dimensions provided in the installation manual

Dimensioned drawings


Measurements in mm

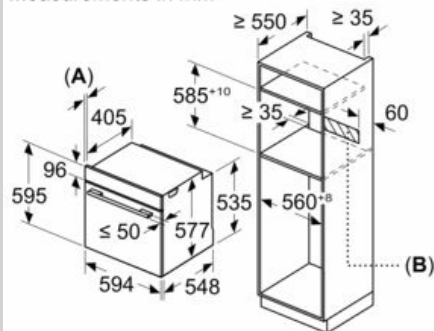


A: 19.5 mm

B: Space for appliance connection 320 x 115 mm

Installation with a hob.

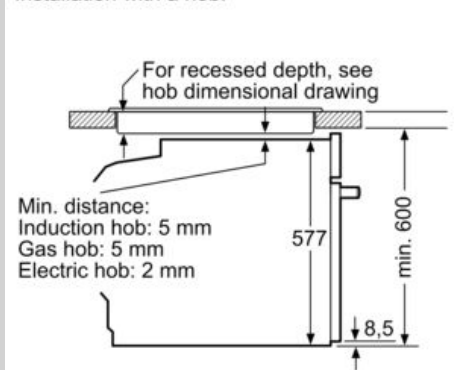


measurements in mm

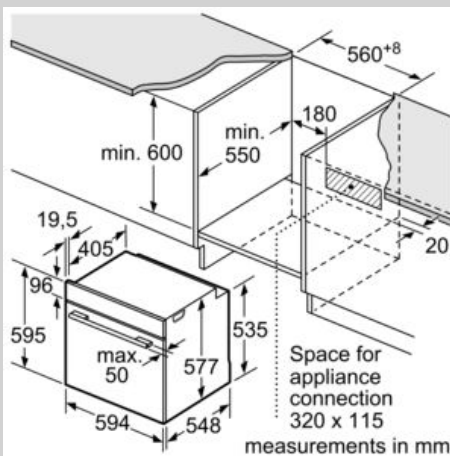

measurements in mm

If the appliance will be installed underneath a hob, the following worktop thicknesses (including substructure if necessary) must be taken into account.

| Hob type                   | min. worktop thickness |       |
|----------------------------|------------------------|-------|
|                            | fitted                 | flush |
| Induction hob              | 37 mm                  | 38 mm |
| Full surface Induction hob | 47 mm                  | 48 mm |
| Gas hob                    | 30 mm                  | 38 mm |
| Electric hob               | 27 mm                  | 30 mm |

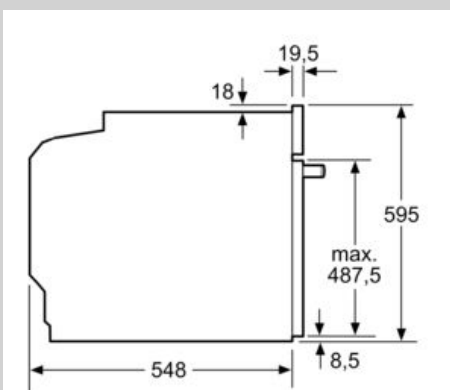

measurements in mm